

CABLE REEL



AVM MINI CABLE REEL



SPRING

MACHINE CONTROL

ON BOARD ELECTRONIC SYSTEMS



AVM - MINI CABLE REEL

Main Features:

- Universal side installation without bracket
- Available in steel rope version
- Available with simple or redundant length sensors
- IP66K
- Block screw drum
- Output signal: 4-20 mA (1 or 2 outputs)
- Length: 2.0 m
3.6 m
5.5 m
6.5 m
- PL D compliance
- Metal ring at the end of the cable **NEW!**





Software, hardware and sensors are manufactured with our trade mark.



SPRING
MACHINE CONTROL
ON BOARD ELECTRONIC SYSTEMS




AVM
Size

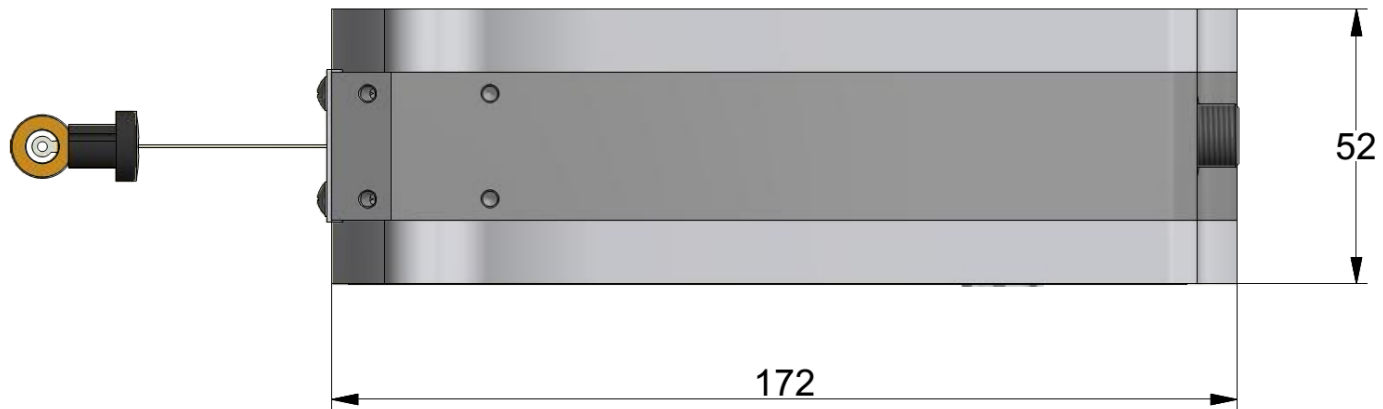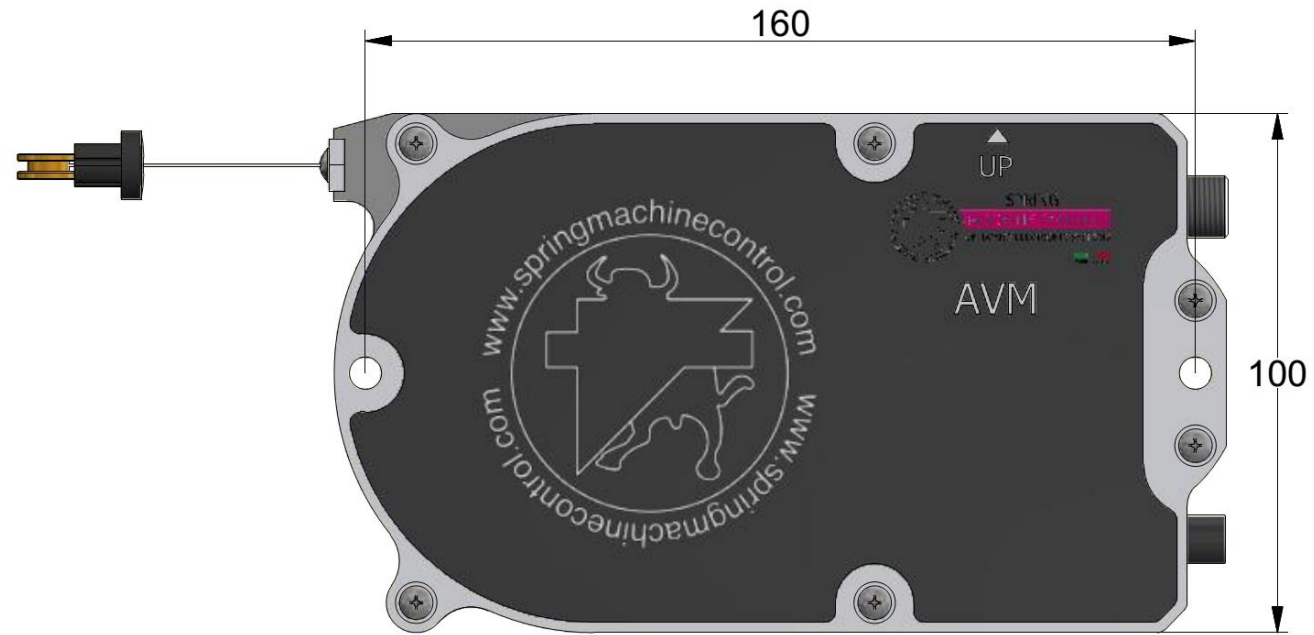

AVM

Technical Features

MODEL	CABLE	SIGNAL		EXIT OF THE CABLE		OUTPUT 4-20mA
		SIMPLE	REDUNDANT	RIGHT	LEFT	
AVM 2	2 m	✓	✓	✓	✓	1-2
AVM 3.6	3.6 m	✓	✓	✓	✓	1-2
AVM 5.5	5.5 m	✓	✓	✓	✓	1-2
AVM 6.5	6.5 m	✓	✓	✓	✓	1-2

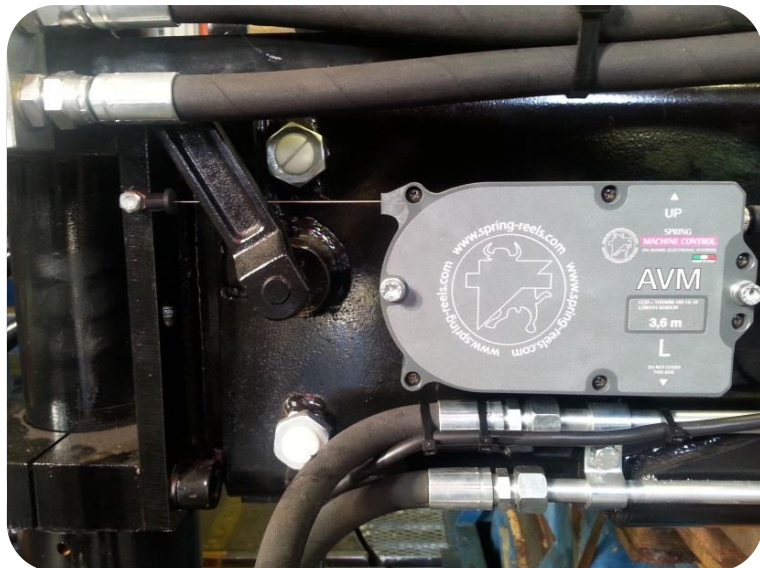



SPRING

MACHINE CONTROL

ON BOARD ELECTRONIC SYSTEMS



SPRING s.r.l.

Via Monte Grappa 4

28040 Dormelletto (NO) – ITALY

Tel. +39 0322 4011.11 R.A.

FAX +39 0322 401140

info@springmachinecontrol.com

P. IVA 02425870033



SPRING s.r.l. reserves the right to modify the contents of this file in any moment, without notice.