

CABLE REEL



AVR CABLE REEL



SPRING

MACHINE CONTROL

ON BOARD ELECTRONIC SYSTEMS



AVR CABLE REEL


Main Features:

- Perfect for electrical signals
- Available in LEFT or RIGHT version
- Cable in PUR
- IP66
- Contacts: starting from 2
- Golden contacts
- Preload: 2 turns
- Extra cable: 1-2m

Software, hardware and sensors are manufactured with our trade mark.




SPRING
MACHINE CONTROL
ON BOARD ELECTRONIC SYSTEMS



CANopen®

Different lengths and cables available, size changes in according to these features.

MODEL	CABLE LENGTH
AVR 05	5m
AVR 06	6m
AVR 10	10m
AVR 12	12m
AVR 15	15m
AVR 20	20m
AVR 25	25m

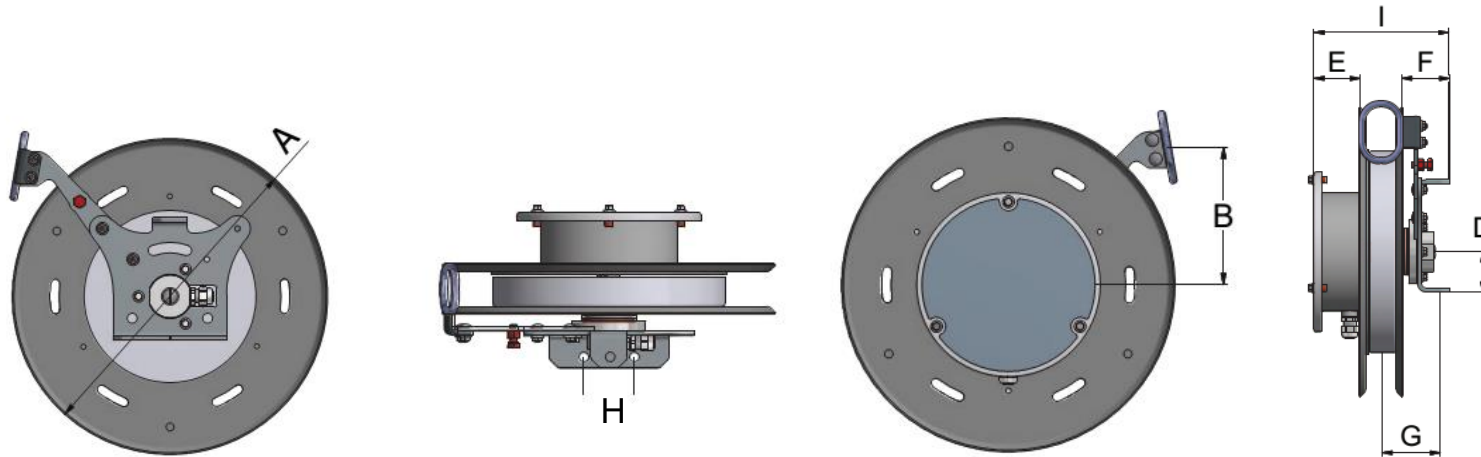

A	B	D	E	F	G	H	I
250mm	95mm	50mm	58mm	55mm	72mm	55mm	160mm
325mm	150mm	50mm	53mm	55mm	68mm	55mm	160mm
450mm	175mm	50mm	58mm	58mm	72mm	55mm	170mm

AVR

Technical Features

MODEL	CABLE	EXTRA CABLE	CONTACTS (starting from)	EXIT OF THE CABLE				CABLE GUIDE	SALT SPRAY TEST
				RIGHT	LEFT	UP	DOWN		
AVR 05	5 m	1-2 m	2	✓	✓	✓	✓	✓	1000 h
AVR 06	6 m	1-2 m	2	✓	✓	✓	✓	✓	1000 h
AVR 10	10 m	1-2 m	2	✓	✓	✓	✓	✓	1000 h
AVR 12	12 m	1-2 m	2	✓	✓	✓	✓	✓	1000 h
AVR 15	15 m	1-3 m	2	✓	✓	✓	✓	✓	1000 h
AVR 20	20 m	1-2 m	2	✓	✓	✓	✓	✓	1000 h
AVR 25	25 m	1-5 m	2	✓	✓	✓	✓	✓	1000 h



**NEW MODEL
2017**





SPRING

MACHINE CONTROL

ON BOARD ELECTRONIC SYSTEMS



SPRING s.r.l.

Via Monte Grappa 4

28040 Dormelletto (NO) – ITALY

Tel. +39 0322 4011.11 R.A.

FAX +39 0322 401140

info@springmachinecontrol.com

P. IVA 02425870033



SPRING s.r.l. reserves the right to modify the contents of this file in any moment, without notice.